


model 28CQ butt fusion machine

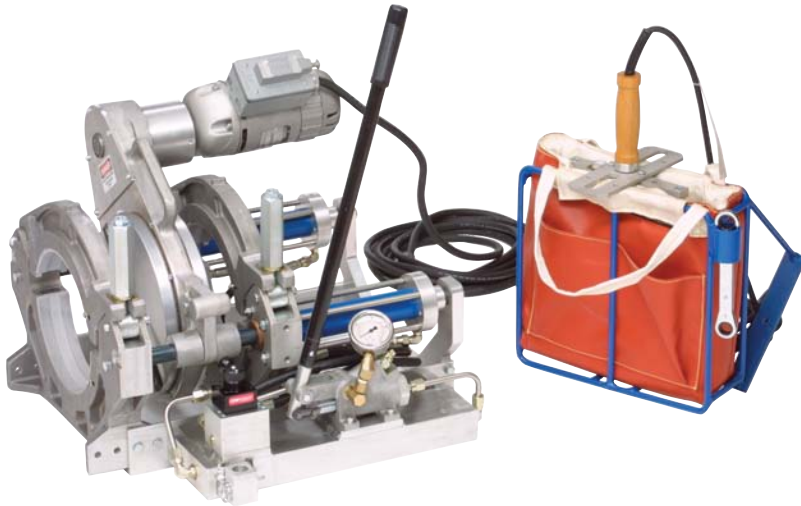

description

Connectra's 28CQ is built for tight spaces. In the ditch, on the piperack, wherever room is at a premium, the 28CQ is ideal. Its straight forward design makes training quick and operation easy, reducing maintenance costs and downtime. And with its quiet and durable facer motor the 28CQ can handle any job. Like all Connectra equipment you can expect low maintenance costs and a rapid return on your investment.

features

- ★ Two-clamp, lightweight design allows easy, in-the-ditch access.
- ★ Ball bearing facer is powered by durable electric motor.
- ★ Pressure gauge offers excellent control of fusion pressures.
- ★ Simple controls allow quick training and easy operation.
- ★ Ported for DataConnect or other competitive data recorders.
- ★ Rugged design with no "bells and whistles" means less maintenance expense.
- ★ Limited three-year warranty.

accessories

We offer a full range of accessories including mitered inserts and the 28CQ cart. The cart allows easy field mobility for the entire unit.

specifications

carriage unit dimensions

Length	24.00 inches	610 mm
Width	24.00 inches	610 mm
Height	17.00 inches	432 mm
Weight	92 pounds	41.7 kg
Total Weight**	185 pounds	83.9 kg

capacities

model 28CQ 2" IPS thru 8" DIPS*

model 28CQ-225mm 63 mm thru 225 mm*

electrical data

120 VAC Single Phase	Watts	Amps
Heater	2,000	16.6
Facer Motor	1,200	10.0
Total Power Consumption	3,200	26.6

**includes facer, heater and heater stand

*with the use of optional reducing inserts

**Specifications are subject to change without notice.*